



BEAVER

The Beaver compact bulkhead style fittings are a tough and durable polycarbonate IP65 rated range of luminaires with a choice of surface mounted or semi-recessed installation and the option of self adhesive pictogram legends or a hanging blade type attachment for exit signage.

FEATURES

- Surface mounted or available with optional semi-recessed bezel
- All models incorporate a hinged geartray and multiple 20mm cable entry drilling points for ease of installation and maintenance
- Flame retardant polycarbonate diffuser available in either opal or fresnel lens style
- The opal diffuser is ideal for use with self adhesive pictogram legends and the prismatic fresnel lens version can be fitted with a hanging blade style panel for exit sign requirements.
- Wire guard available as accessory for additional vandal resistance.
- Mains only versions and 3hr maintained or non-maintained versions available as standard

ORDER DETAILS

Order Code	Description	Lamp Type & Rating	Gear	Weight (kg)
BE8MW	350x120mm Maintained	1x8W T5	HF	1.35
BE8NMW	350x120mm Non-maintained	1x8W T5	HF	1.2
BE8W	350x120mm Mains Only	1x8W T5	HF	0.95

Suffix

- O Opal Diffuser
- P Prismatic Fresnel Diffuser

Accessories


- SA Self Adhesive Legend - also add suffix for required pictogram (see below)
- BLD Hanging Blade Legend - also add suffix for required pictogram (see below)
- L2 Legend. Running Man, Arrow Left, Door
- L3 Legend. Running Man, Arrow Right, Door
- L4 Legend. Running Man, Arrow Up, Door
- L5 Legend. Running Man, Arrow Down, Door
- BEREC Semi Recessing Bezel
- WG Protective Wire Guard Attachment

TECH DETAILS

Gear Mains Only, Maintained Emergency or Non-maintained Emergency

Lamp Type  T5

DIMENSIONS

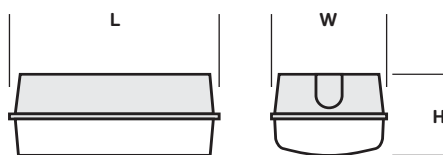

L	W	H
350	120	90

MATERIALS AND FINISHES

Body Injection Moulded Polycarbonate
Controller Opal or Prismatic Fresnel Lens
Finish White

