

HIGHWAY 1

The Highway 1 is a range of high output, corrosion resistant street lighting luminaires. The Highway 1 has been designed with easy installation and maintenance in mind making it an attractive option for road lighting projects anywhere.

FEATURES

- Suitable for lighting of local and side streets, commercial and residential ways and many other industrial areas
- Energy saving, very high performance
- High object visibility and low glare
- 'Cut off' zero pollution reflectors
- Long life performance
- Weatherproof, corrosion and temperature resistant UV stabilised body and cover
- High performance pure aluminium reflector with very high output
- Available with a choice of frosted or clear glass to suit any preference (frosted glass special order only)
- For top mounting on poles 60-76mm diameter and angled arms 42-60mm diameter
- IP66 rated optical housing
- IP43 rated lantern
- Automatic switch splitter isolates head when cover is opened

ORDER DETAILS

Order Code	Description	Lamp Type & Rating	Windage (m ²)	Weight (kg)
HG170	Highway 1, Clear	70W SON-T Plus or 70W CDO-TT	0.122	6.8
HG1100	Highway 1, Clear	100W SON-T Plus or 100W CDO-TT	0.122	6.8
HG1150	Highway 1, Clear	150W SON-T Plus or 150W CDO-TT	0.122	6.8
HG1250	Highway 1, Clear	250W SON-T Plus or 250W HQI-T/D	0.122	6.8

Accessories

HG1WB Wall Mounting Bracket

Columns (76mm ø)

CL3MRS Column, 3m Rooted, Standard Duty

CL4MRS Column, 4m Rooted, Standard Duty

CL5MRS Column, 5m Rooted, Standard Duty

CL6MRS Column, 6m Rooted, Standard Duty

Column Accessories (76mm ø)

CL01B Column Post Top Spigot Adaptor


CL02B Column Top, Straight Arm Bracket for mounting Twin Post Top Luminaires

TECH DETAILS

Gear Magnetic


Lamp Type  SON-T PLUS

Lamp Type  CDO-TT




Inc 100

Photometrics LOR HG170S 0.764




Inc 75

Photometrics LOR HG1100S 0.678



Inc 75

Photometrics LOR HG1150S 0.693



Inc 75

Photometrics LOR HG1250S 0.664


MATERIALS AND FINISHES

Body Polyamide

Controller Flat, Hinged, Toughened Safety Glass

Finish Light Grey (RAL7035)

DIMENSIONS

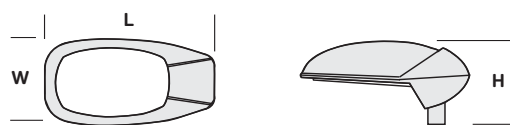

L	W	H
610	310	334

IP43 IP65   CE