



ROMAN

An extremely tough and durable yet elegant range of exterior, surface mounted, amenity bulkhead luminaires. Available in either black or silver finish. Manufactured from die-cast aluminium and fitted with an impact resistant opal polycarbonate diffuser and eyelid style front cover. Roman is fully gasketed and sealed to IP65 and is available with a choice of compact fluorescent lamp options.

FEATURES

- IP65 rated, die-cast housing available in black or silver finish
- Fitted with an impact resistant opal polycarbonate diffuser and 'eyelid' style die-cast front cover
- Available with a range of energy efficient compact fluorescent lamps
- High frequency electronic control gear mounted on a removable gear tray for ease of maintenance
- Integral emergency available
- **LED versions available**

ORDER DETAILS

Order Code	Description	Lamp Type & Rating	Gear	Weight (kg)
RO28	363mm Diameter	1x28W 2D	HF	5.3
RO38	363mm Diameter	1x38W 2D	HF	5.3
RO218	363mm Diameter	2x18W PLC	HF	5.3
RO226	363mm Diameter	2x26W PLC	HF	5.3

Suffix

DAL	Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
DSI	Switch Dim (see accessory DC1PM) / Digital Signal Interface (DSI)
D	Analogue 1-10V dimming (see accessory DC/100)
S	Silver Finish
B	Black Finish

Emergency

E	Maintained 3hr Emergency Integral
EAD	Integral 3hr Maintained Addressable Emergency via DALI Emergency System
ELA	Integral 3hr Maintained Self Testing Emergency

Accessories

DC/100	Dimming Controller & Switch. Analogue 1-10V
DC1PM	Push to make switch for use with both Touch Dim and Switch Dim gear


TECH DETAILS

Gear High Frequency

Lamp Type  2D

Lamp Type  PLC

DIMENSIONS

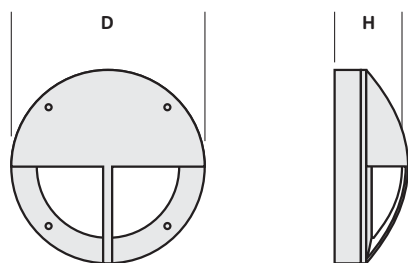

Dia	H
363	140

MATERIALS AND FINISHES

Body	Die-cast Aluminium
Controller	Opal Polycarbonate Diffuser and Eyelid Front Cover
Finish	Choice of Black or Silver

NOTE

DALI and DSI are not available with 2D lamp versions.
1-10V dimming not available with 38W 2D lamp versions.

