



DRAYCON

The Draycon is IP54 rated at the front face and is fitted with a gasket seal between the diffuser and body of the luminaire. Available as 2 or 4 lamp T5 versions in either 600mm or 1200mm lengths. The Draycon range is ideal for use in a wide range of clean environments where recessing depth is minimal.

FEATURES

- Shallow recessed modular luminaire suitable for most ceiling types
- IP54 rated at the front face
- Fitted with opal or prismatic diffuser removable with a suction cup
- Available as 2 or 4 lamp T5 versions in either 600mm or 1200mm lengths
- Dimmable versions available
- Emergency versions available

ORDER DETAILS

Order code	Description	Lamp Type and Rating	Gear	Weight (kg)
DN424O	600x600mm Opal	4x24W T5	HF	5.1
DN424P	600x600mm Prismatic	4x24W T5	HF	4.8
DN254O	1200x300mm Opal	4x14W or 2x28W or 2x54W T5	HF	5.1
DN254P	1200x300mm Prismatic	4x14W or 2x28W or 2x54W T5	HF	4.8
DN454O	1200x600mm Opal	4x28W or 4x54W T5	HF	8.4
DN454P	1200x600mm Prismatic	4x28W or 4x54W T5	HF	8.0

Suffix

DAL	Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
DSI	Switch Dim (see accessory DC1PM) / Digital Signal Interface (DSI)
D	Analogue 1-10V dimming (see accessory DC/100)

Emergency

E	Remote Maintained 3hr Emergency
---	---------------------------------


Accessories

DC/100	Dimming Controller & Switch. Analogue 1-10V
DC1PM	Push to make switch for use with both Touch Dim and Switch Dim gear

TECH DETAILS


Gear High Frequency

Lamp Type  T5



Photometrics	DN424O
LOR	0.565
SHR NOM	1.50
SHR MAX	1.666
SHR MAX TRANS	1.896

DIMENSIONS

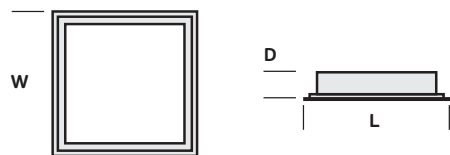

	L	W	D
Draycon 4x14/24W	600	600	60
Draycon 2x28/54W	1200	300	60
Draycon 4x28/54W	1200	600	60

MATERIALS AND FINISHES

Body	Steel
Controller	Prismatic or Opal Polycarbonate edged with Aluminium
Finish	White

