

SECURELITE

The Securelite range of vandal resistant luminaires provides excellent light distribution utilising high frequency control gear, specifically designed for use in secure environments. The Securelite is extremely robust and is available as a surface ceiling or cornice mounted luminaire.

FEATURES

- Solid and strong body, welded from 2mm thick steel
- Available as a surface ceiling or cornice mounted luminaire
- 3mm thick prismatic polycarbonate lens
- T5 lamp technology with multi-wattage HF ballast
- Integral emergency available
- Dimmable versions available
- TORX® tamperproof vandal resistant screws supplied as standard
- IP54 Rated

ORDER DETAILS

Order code	Description	Lamp Type and Rating	Gear	Weight (kg)
SEC214224	Ceiling Mounted Securelite	2x14W T5 or 2x24W T5	HF	6.0
SEC214224C	Cornice Mounted Securelite	2x14W T5 or 2x24W T5	HF	11.0

Suffix

DAL	Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
DSI	Switch Dim (see accessory DC1PM) / Digital Signal Interface (DSI)
D	Analogue 1-10V dimming (see accessory DC/100)

Emergency

E	Maintained 3hr Emergency Integral
---	-----------------------------------


Accessories

DC/100	Dimming Controller & Switch. Analogue 1-10V
DC1PM	Push to make switch for use with both Touch Dim and Switch Dim gear

TECH DETAILS


Gear High Frequency

Lamp Type  T5




Photometrics	SEC214224
DLOR	0.598
ULOR	0.012
LOR	0.610
SHR NOM	1.75
SHR MAX	1.757
SHR MAX TRANS	2.051

DIMENSIONS

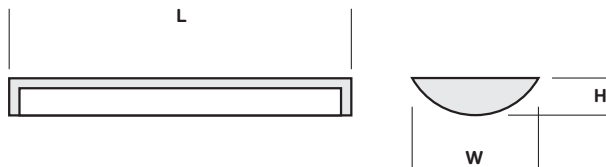

	L	W	H
Securelite Ceiling Mount	715	245	72

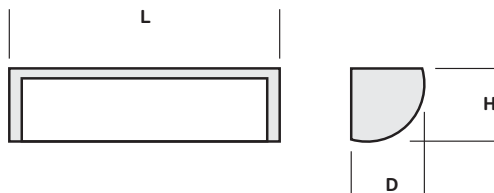

	L	D	H
Securelite Cornice Mount	715	176	176

MATERIALS AND FINISHES

Body	2mm Zintec Steel
Controller	3mm Prismatic Polycarbonate
Finish	White

