



CENTURION

The Centurion is a range of surface mounting, vandal resistant luminaires. The Centurion uses an opal polycarbonate diffuser which is secured between the two layers of a double skin steel body and is therefore ideally suited to areas where tough yet aesthetically pleasing equipment is needed.

FEATURES

- Decorative yet extremely robust
- Suitable for use in secure environments
- Double skin steel body
- Energy efficient use of compact fluorescent lamps and high frequency gear
- Emergency versions available (not on CN155WO)
- Twin 24W PLL for higher light output
- Dimmable versions available
- Socket head fixing screws supplied as standard, TORX® tamperproof vandal resistant screws available as option

ORDER DETAILS

Order code	Description	Lamp Type and Rating	Gear	Weight (kg)
CN128WO	Centurion	1x28W 2D	HF	5.6
CN138WO	Centurion	1x38W 2D	HF	5.6
CN155WO	Centurion	1x55W 2D	HF	5.6
CN224WO	Centurion	2x24W PLL	HF	5.6

Suffix

DAL	Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
DSI	Switch Dim (see accessory DC1PM) / Digital Signal Interface (DSI)
D	Analogue 1-10V dimming (see accessory DC/100)
NL	Nightlight 7W-9W PLS (not available on emergency versions, NL circuit should not be operated simultaneously with main lamp)
VRS7	Vandal Resistant Screws
Emergency	
E	Maintained 3hr Emergency Integral (Must be remote on 1x55W version)
Accessories	
DC/100	Dimming Controller & Switch. Analogue 1-10V
DC1PM	Push to make switch for use with both Touch Dim and Switch Dim gear
VRS7-DRIVER	Vandal Resistant Driver T25 Tamperproof TORX®


TECH DETAILS

Gear High Frequency

Lamp Type  2D


Lamp Type  PLL

Lamp Type  PLS



Photometrics	CN128WO
LOR	0.47
SHR NOM	1.50
SHR MAX	1.635
SHR MAX TRANS	1.849

DIMENSIONS

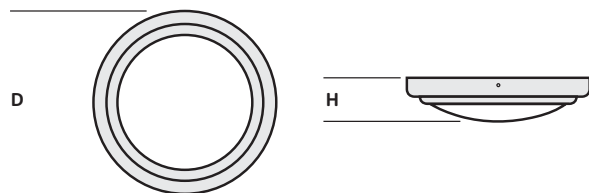

Dia	H
534	127

MATERIALS AND FINISHES

Body	1mm Zintec Steel
Controller	Opal Polycarbonate
Finish	White

NOTE

DALI, DSI and DTD are not available with 2D lamps. D Analogue 1-10V is not available on 38W 2D lamps.

