



WING

The Wing luminaire is designed and manufactured using extruded aluminium and a dust-proof, anti-glare, smooth diffuser. This wall / ceiling mounted luminaire is suitable for healthcare applications and commercial environments where a direct / indirect light source is required.

FEATURES

- Stylish aluminium extruded body with die-cast aluminium end caps
- Dust-proof, anti-glare diffuser
- Complete with all-use connector for ceiling or wall mounting
- Twin lamp versions available
- Dimmable versions available
- Integral emergency version available (on single lamp versions only)

ORDER DETAILS

Order code	Description	Lamp Type and Rating	Gear	Weight (kg)
W136SCC	Wing 1200mm	1x36W T8	HF	2.8
W158SCC	Wing 1500mm	1x58W T8	HF	3.0
W236SCC	Wing 1200mm	2x36W T8	HF	3.2
W258SCC	Wing 1500mm	2x58W T8	HF	3.6

Suffix

- DAL Touch Dim (see accessory DC1PM) / Digital Addressable Lighting Interface (DALI)
- DSI Switch Dim (see accessory DC1PM) / Digital Signal Interface (DSI)
- D Analogue 1-10V dimming (see accessory DC/100)

Emergency

- E Integral 3hr Emergency


Accessories

- DC/100 Dimming Controller & Switch. Analogue 1-10V
- DC1PM Push to make switch for use with both Touch Dim and Switch Dim gear

TECH DETAILS

Gear High Frequency


Lamp Type  T8



Photometrics
LOR

W158SCC
0.503

DIMENSIONS

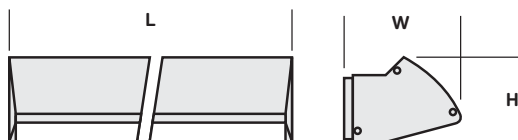

	L	W	H
Wing 1x36W/2x36W	1200	158	115
Wing 1x58W/2x58W	1500	158	115

MATERIALS AND FINISHES

- Body Extruded Aluminium with Die-cast End Caps
- Controller Polycarbonate
- Finish White

